



# USER INSTRUCTION MANUAL

MODEL: US-5075RR

DESCRIPTION: SEAM STOP

STANDARD FIT - US-HN40, US-HN60, US-HPS40  
OTHER SIZES AVAILABLE 7-10 DAYS LEAD TIME



1-800-850-5914

PHOENIX, AZ USA

WWW.ULTRASAFEUSA.COM

MEETS OSHA & ANSI Z359.1

## Performance and Value

The Ultra-Safe Standing Seam Swiveling Roof Anchor is designed to be a removable and reusable anchor for residential or commercial standing seam roofs. The non-penetrating design won't damage the roof, makes it easy to install, and can be moved from jobsite to jobsite.


- Allows for 360 degree rotation and unrestricted access on rooftops
- Portable and reusable design provides added versatility
- Can be installed on a flat or sloped roof
- Meets the latest OSHA and ANSI standards

## Easy to Install and Maintain

- 1) Place the seam clamps over the roof panel seams and tighten with a 3/16" hex bit with a 1/4" drive screw gun
- 2) Center the load bar and swiveling bracket and tighten clamp plates
- 3) Install self retracting lifeline to the swivel bracket using the supplied 5/8" bolt

## Dismantling - Release seam clamps

**Important:** See User Instruction Manual for Detailed Instructions

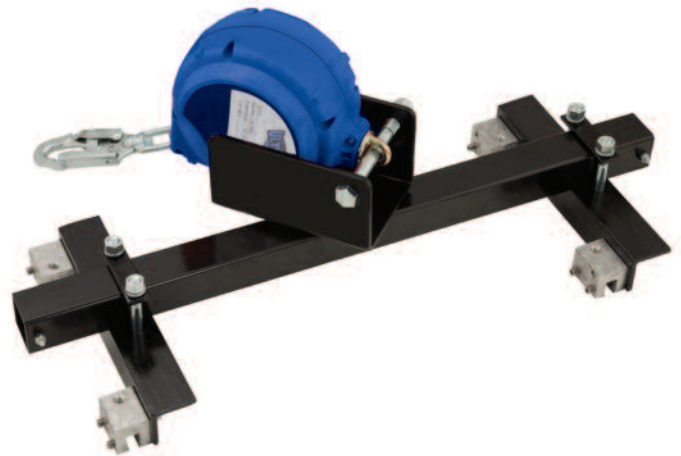

## US-5075RR Seam Stop

- **Universal Bracket:** Accommodates most self retracting lifelines
- **Self Retracting Lifeline:** Provides easy to use full protection for a large work area, must order separately
- **Portable Design:** Easily moves from job site to jobsite
- **Non-penetrating Clamps:** Attaches to roof without damage
- **Adjustable:** Fits seam spacing 12" - 24" (30.48cm - 60.96cm)
- **Swiveling Design:** Allows for 360 degree rotation and unprohibited movement

## Specifications:

Material: Swivel Bracket: Steel – Seam Clamps: Aluminum  
Finish: Black E-coat paint  
Weight: 25 lbs (11.3kg)  
Size: 30" x 12" x 8.45" (76cm x 30cm x 21cm)  
Capacity: 480 lbs (one person)

