



INSTALLATION INSTRUCTIONS

MODEL: US-1075GG

DESCRIPTION: Girder Grip

MEETS OSHA & ANSI Z359.7-2011




1-800-850-5914

PHOENIX, ARIZONA USA

WWW.ULTRASAFEUSA.COM


STEP 1

Preparation for using US-1075GG. Drill 1" Hole in Girder(a.). Place US-1075GG in hand as shown(b.). Beam can be horizontal(a.) or vertical(c.).

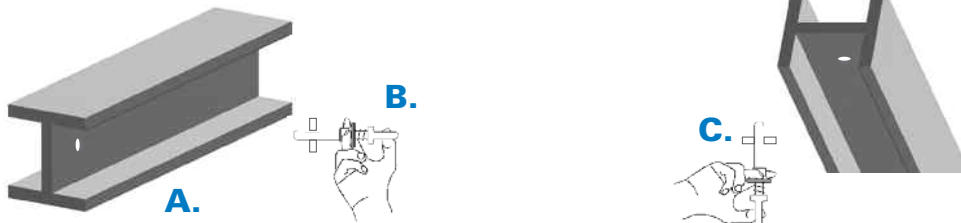


STEP 2

Depress the trigger by squeezing the trigger while thumb is in eye of Grip. This straightens out the moveable anchor bar to allow insertion in hole.



STEP 3

While keeping the anchor trigger depressed(a) insert into the hole all the way(b.,c.).

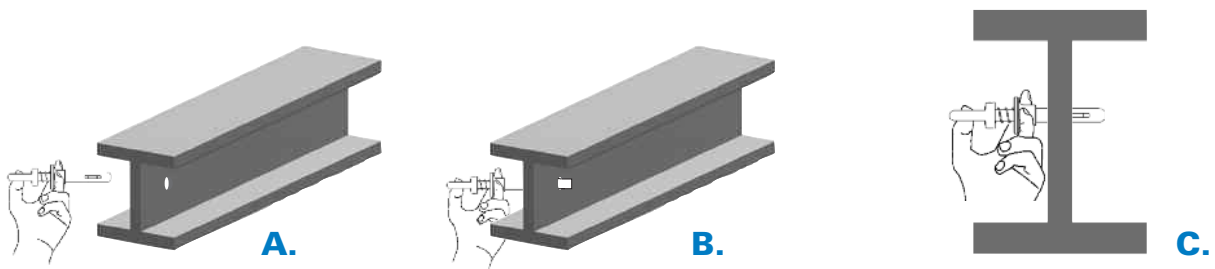

STEP 4

After insertion, release the anchor trigger (a.) causing the anchor bar to return to normal position(b.). You may now connect carabiner, snaphook, etc, as needed,

